



Model 200i/400i


Recirculating fume extraction is now extremely important with the rising concern for our environment and employee safety. Purex Fume Extractors provide not only a flexible and portable process for plant redesigns and expansions, but also a more stable process by providing a controlled airflow to remove harmful fumes. All this while eliminating the added costs of building modifications, increased air handling systems and lost energy.

Purex Digital Systems


- Automatic Flow Control maintains constant extraction rate
- Adjustable Air Flow extends filter life
- Blocked Filter Warning
- ❖ Easy to change filters
- Low energy consumption
- Quiet operation
- Welded stainless steel construction
- Reverse Air Flow prevents condensation and extends filter life
- Continuous run brushless motors

- HEPA filtration removes 99.997% of particles down to .3 microns
- Gas and particle sensors on exhaust
- **❖** Filter Blocked Monitor
- ❖ Gas Safety Sensor
- ❖ Particle Safety Sensor
- **❖** Motor Run Indicator
- Airflow reading
- Filtered air temperature
- ❖ Quick-read visual display
- **❖** Remote Machine Interface

200i and 400i Volume Control

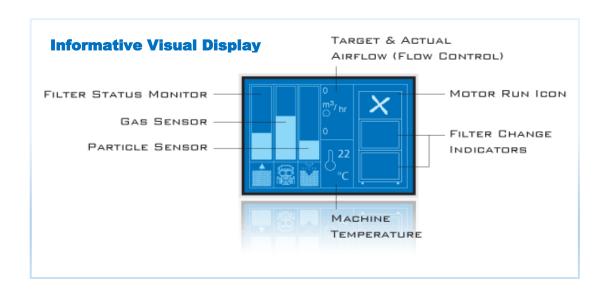

Main Filter Options HEPA/Chemical 113505 HEPA/Twin Chemical 113579 HEPA Chemical Cleanroom* 113512 Chemical 113508 *Use F8/F9 Pre-filter



Labyrinth Pre-Filter Options



F6 (std) 60-80% eff 1-3μ 202268 F8/F9 Composite >95% eff .5-1 μ 202271

- 1) Air inlet
- 2) Pre-filter
- 3) Main filter (HEPA)
- 4) Main filter (Carbon)
- 5) Clean air return
- 6) Filter lock Handle
- 7) Filter I.D. label

	200i		400i	
Model	0LX2121D	0LX2110D	0LX4013D	0LX4010D
Voltage (50hz/60Hz)	120v (1ph)	230v (1ph)	120v (1ph)	230v (1ph)
Wattage	0.47 kW	0.46 kW	1.37 kW	1.30 kW
Airflow	88 cfm (150 m³/Hr)		275 cfm (467 m³/Hr)	
Vacuum	69 inwg (17.29 kPa)		40 inwg (9.92 kPa)	
Air Inlet	3.14in (80mm) Safe Seal			
Sound Rating	52 dBA			
Dimensions (L/W/H)	18.3in x 21in x 42.25in			
Weight	132 lbs			