

ASYS Group Technologies

BLG 01 Basic Lift Gate




Description


The Basic Lift Gate is a transport conveyor that can create an opening in a production line. The conveyor segment can be hinged open by the operator and has to be closed manually again. The opening is 845 mm wide. The powder coated steel frame ensures process stability and excellent durability.

Features


- _ Start / Stop push button
- _Walk through
- _ Anti-static conveyor belts
- _ SMEMA Interface

- _Transport height 850 mm ± 50 mm
- _ Electrical width adjustment _ Adjustable handover speed
- _ Inspection function 0/1
- _ Pneumatic lock







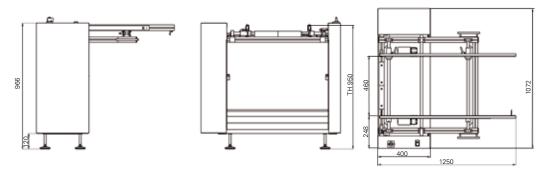

BLG 01 Basic Lift Gate

ASYS Handling Equipment - Basic Series

Basic Series

BLG 01

Machine Configuration

Transport height 950 mm ± 50 mm

Max. transport width 460 mm

Pass through width 845 mm

Interface SMEMA

Transfer direction from left to right

Operating side Front of the machine

Fixed rail Front of the machine

Panel Dimensions

Panel length 50 to 460 mm
Panel width 50 to 460 mm
Panel thickness 0.8 to 4.5 mm
Component clearance ± 40 mm
Panel weight to 3 kg

Installation Requirements

Power supply 230 V / 115 V, 50 / 60 Hz, \pm 10% Power supply system L1 + N + PE Power consumption 0,14 kW

Machine Description

Noise Level Sasic Lig

Upgrades

Control panel T70 Additional interface protocol Automatic width adjustment ^{b)} Machine networking via IC Net

a) RAL colors at a surcharge b) only with control panel T70

www.asvs-group.com

ASYS Automatisierungssysteme GmbH Benzstraße 10, D-89160 Dornstadt Germany Tel. (+49) 7348 9855 0